
INSTALLATION INSTRUCTIONS



Video Conference Shelf Assembly

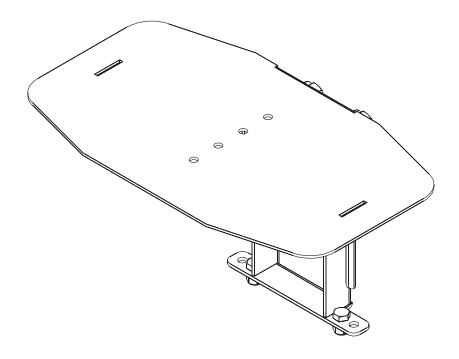

PAC-150

DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



IMPORTANT SAFETY INSTRUCTIONS!



WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.



CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.

WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.



WARNING: Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component.



WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all equipment and accessories mounted on the PAC150 does not exceed 10 lbs (4.54 kg).




WARNING: RISK OF INJURY TO PERSONS! Do not use this mounting system to support video equipment such as televisions or computer monitors.



WARNING: Do not use this product outdoors.

-- SAVE THESE INSTRUCTIONS--

DIMENSIONS

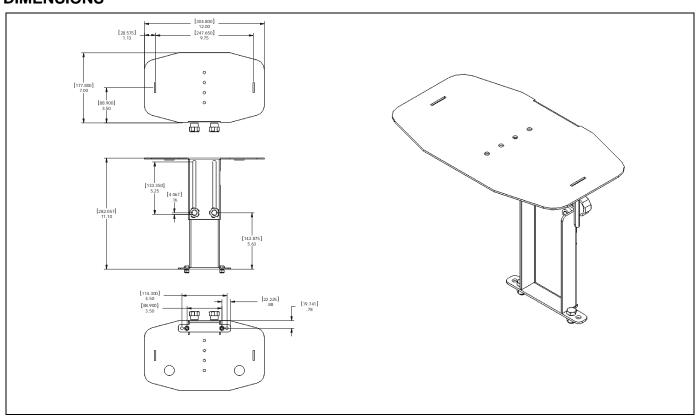


Installation Instructions PAC-150


LEGEND

	Tighten Fastener	Pencil Mark
G	Apretar elemento de fijación	Marcar con lápiz
	Befestigungsteil festziehen	Stiftmarkierung
	Apertar fixador	Marcar com lápis
	Serrare il fissaggio	Segno a matita
	Bevestiging vastdraaien	Potloodmerkteken
	Serrez les fixations	Marquage au crayon
Aflojar elem Befestigung Desapertar Allentare il f Bevestiging	Loosen Fastener	Drill Hole
	Aflojar elemento de fijación	Perforar
	Befestigungsteil lösen	Bohrloch
	Desapertar fixador	Fazer furo
	Allentare il fissaggio	Praticare un foro
	Bevestiging losdraaien	Gat boren
	Desserrez les fixations	Percez un trou
	Phillips Screwdriver	Adjust
(4)	Destornillador Phillips	Ajustar
	Kreuzschlitzschraubendreher	Einstellen
	Chave de fendas Phillips	Ajustar
	Cacciavite a stella	Regolare
	Kruiskopschroevendraaier	Afstellen
	Tournevis à pointe cruciforme	Ajuster
680	Open-Ended Wrench	Remove
	Llave de boca	Quitar
	Gabelschlüssel	Entfernen
	Chave de bocas	Remover
	Chiave a punte aperte	Rimuovere
	Steeksleutel	Verwijderen
	Clé à fourche	Retirez
1.	By Hand	Optional
	A mano	Opcional
	Von Hand	Optional
Fos	Von Hand Com a mão	Optional Opcional
	Von Hand Com a mão A mano	Optional Opcional Opzionale
	Von Hand Com a mão A mano Met de hand	Optional Opcional Opzionale Optie
	Von Hand Com a mão A mano	Optional Opcional Opzionale
	Von Hand Com a mão A mano Met de hand	Optional Opcional Opzionale Optie
	Von Hand Com a mão A mano Met de hand À la main	Optional Opcional Opzionale Optie En option
	Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench	Optional Opcional Opzionale Optie En option Security Wrench
	Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench Llave de cabeza hexagonal	Optional Opcional Opzionale Optie En option Security Wrench Llave de seguridad
	Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench Llave de cabeza hexagonal Sechskantschlüssel	Optional Opcional Opzionale Optie En option Security Wrench Llave de seguridad Sicherheitsschlüssel
	Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench Llave de cabeza hexagonal Sechskantschlüssel Chave de cabeça sextavada	Optional Opcional Opzionale Optie En option Security Wrench Llave de seguridad Sicherheitsschlüssel Chave de segurança

TOOLS REQUIRED FOR INSTALLATION

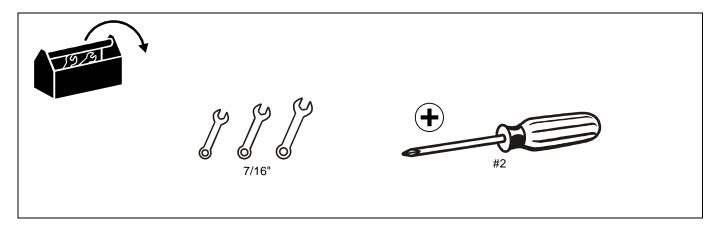

PARTS

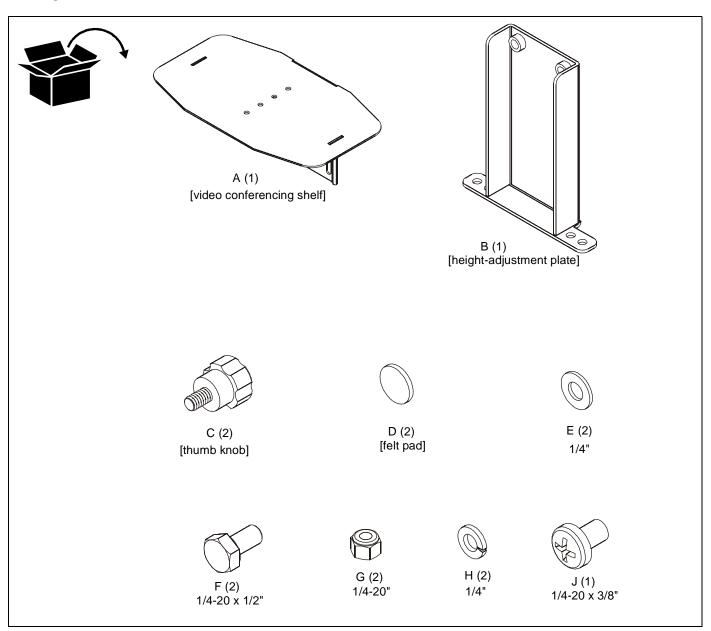

Installation Instructions PAC-150

Assembly And Installation

The optional PAC-150 video conference shelf assembly is designed for attachment to Chief floor stands or any mount with a medium or large faceplate.

 Using two 1/4-20 x 1/2" hex bolts (F), two 1/4" lock washers (H), and two 1/4-20 hex nuts (G), secure height-adjustment plate (B) to top of cart or faceplate. (See Figure 1)

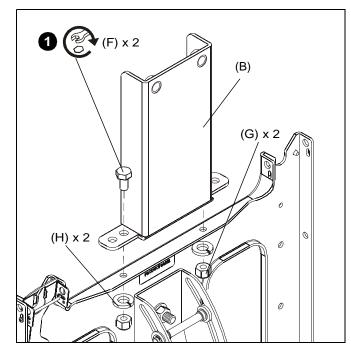


Figure 1

Install two felt pads (C) on bottom of shelf (A) to prevent scratches on top of display panels when shelf is lowered. (See Figure 2)

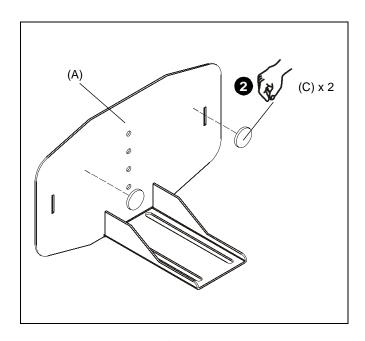


Figure 2

3. Using two thumb knobs (C) and two 5/16" flat washers (E), secure the shelf (A) to the height-adjustment plate (B). (See Figure 3)




Figure 3

Camera Mounting

WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all equipment and accessories mounted on the PAC150 does not exceed 10 lbs (4.54 kg).

NOTE: Mounting options will vary depending on the type of camera being mounted.

 Install 1/4-20 x 3/8" Phillips pan machine screw (J) through one of the mounting holes on shelf and into the hole on the bottom of the camera. (See Figure 4)

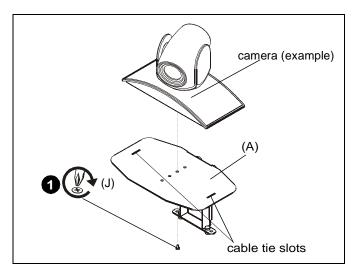


Figure 4

NOTE: Camera can also be secured to mount by threading a tie through outside slots on camera mount and around the camera. (See Figure 4)

NOTE: It is also acceptable to mount the camera directly to the shelf without any screws or ties.

Adjustments

- Loosen thumb knobs so that height of shelf may be adjusted. (See Figure 5)
- 2. Adjust shelf to desired height using two thumb knobs (E). (See Figure 5)
- Tighten thumb knobs to secure shelf at the desired height. (See Figure 5)

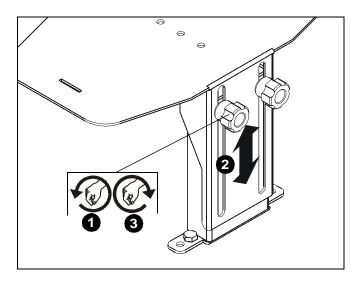


Figure 5

Installation Instructions PAC-150



Chief Manufacturing, a products division of Milestone AV Technologies

8800-000017 Rev02 ©2012 Milestone AV Technologies, a Duchossois Group Company www.chiefmfg.com 07/12 USA/International A 6436 City West Parkway, Eden Prairie, MN 55344

Europe

P 800.582.6480 / 952.225.6000

F 877.894.6918 / 952.894.6918

A Franklinstraat 14, 6003 DK Weert, Netherlands

P +31 (0) 495 580 852

F +31 (0) 495 580 845

Asia Pacific A Office No. 1 on 12/F, Shatin Galleria

18-24 Shan Mei Street Fotan, Shatin, Hong Kong

P 852 2145 4099

F 852 2145 4477

